

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 779 755 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
18.06.1997 Bulletin 1997/25

(51) Int. Cl.<sup>6</sup>: **H04Q 7/22**, H04B 7/26,  
H04Q 7/38

(21) Application number: 96120068.0

(22) Date of filing: 13.12.1996

(84) Designated Contracting States:  
**DE FR GB IT SE**

(30) Priority: 13.12.1995 JP 324768/95  
19.01.1996 JP 7792/96

(71) Applicant: **NTT MOBILE COMMUNICATIONS  
NETWORK INC.**  
Minato-ku, Tokyo (JP)

(72) Inventors:  
• **Nakano, Etsuhiro**  
Yokosuka-shi, Kanagawa-ken (JP)


• **Higashi, Akihiro**  
Yokosuka-shi, Kanagawa-ken (JP)  
• **Kikuchi, Fumio**  
Yokohama-shi, Kanagawa-ken (JP)

(74) Representative: **Ritter und Edler von Fischern,**  
Bernhard, Dipl.-Ing. et al  
Hoffmann, Eitle & Partner,  
Patentanwälte,  
Arabellastrasse 4  
81925 München (DE)

(54) **Base station selection scheme for CDMA cellular system using perch channel and received SIR**

(57) A base station selection scheme for a CDMA cellular system capable of reducing the transmission power of the mobile station and increasing the subscriber capacity, by accounting for the uplink interference power at each base station. An uplink interference level is measured at each base station, while a perch channel is transmitted from each base station to the mobile station, and a perch channel reception level of the perch channel transmitted from each base station is measured at the mobile station. Then, a connection target base station to be connected with the mobile station is selected according to a received SIR (Signal to Interference Ratio) of each base station determined from the perch channel reception level measured at the mobile station and the uplink interference level measured at each base station.

FIG.1

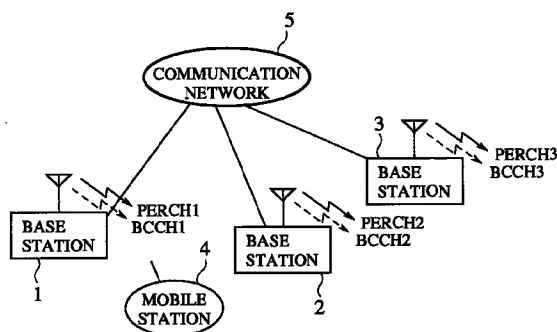

**EP 0 779 755 A2**